


Vertical swing up grab bar




15.121.W
white epoxy

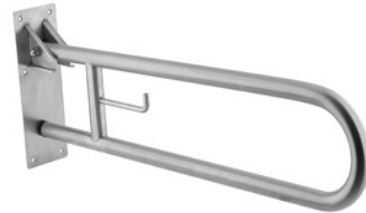

15.221.S, 15.222.S, 15.223.S
stain finish

- Vertical swing-up grab bar with roll holder hock to place next to the wash basins and toilet.
- It consists of a "U" shape tube, a paper roll holder and a heavy-duty wall plate, 3 mm thick.
- Safety swing-up position that locks the bar in vertical position.
- **15.121.W.** made of steel, white epoxy.
- **15.221.S, 15.222.S, 15.223.S.** made of AISI 304 stainless steel, satin finish.
- Recommended for use in bathrooms and showers.
- Suitable for bathrooms adapted to disabled.
- 32mm diameter bar for easier gripping.
- Highest durability and rusting resistance.
- Other models available: 700 mm / 800 mm.

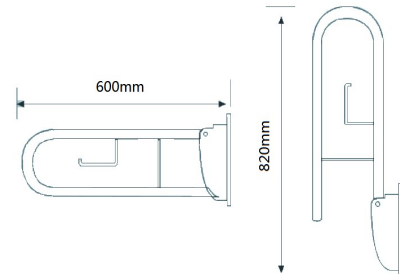


15.121.W 600mm

COMPONENTS & MATERIALS

- Ø32 mm tube grab. Steel thickness: 1,2 mm.
- Recommended installation height: 70-75 cm from floor.
- Stainless steel screws and volts for masonry walls.
- Incorporates 6 screws holes for wall mounting.
- With brake and paper holder.

TECHNICAL SPECIFICATIONS

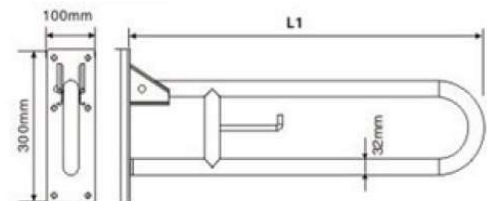

Bar tube	Ø32 mm
Bar tube thickness	1.2 mm
Mounting flange	100x300 mm

15.221.S	600mm
15.222.S	700mm
15.223.S	800mm